


Tank Contents Gauge - Direct Acting with 4-20mA TX

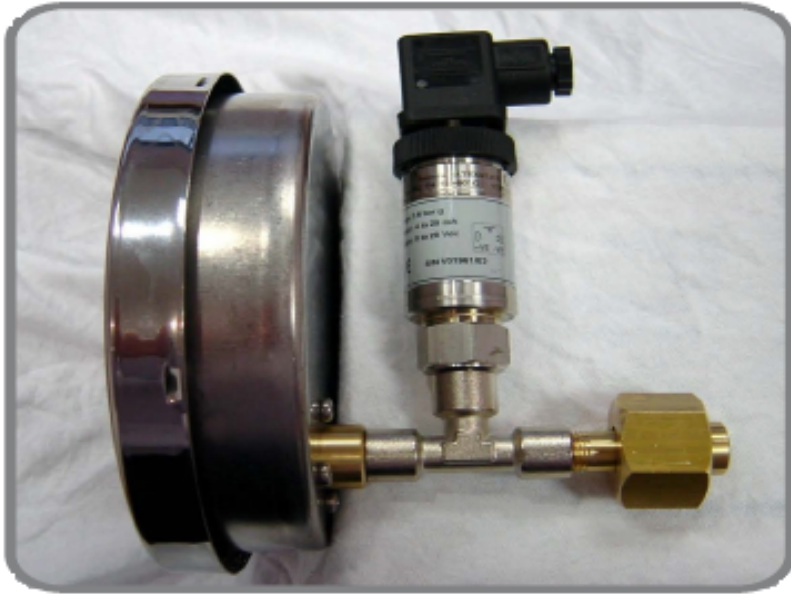

Mostly used to measure: Fuel oil, Diesel, Paraffin, Lube oil, Kerosene & Water

Specifications

- Mounting:** Direct back connection
- Connection:** Via 3/4"bsp Non-return Valve
- Accuracy:** 1%
- Case & Bezel:** 304 St.St Bayonet locking bezel
- Element:** Phosphor Bronze
- Gasket Seal:** Rubber
- Dial:** White Aluminium with black markings
- Pointer:** Black Oxidised Aluminium
- Window:** Glass or Clear Acrylic
- Movement:** Brass

Installation Details

The gauge is fitted approx. 1m from bottom of tank, and indicates the actual head of liquid above the gauge. Gauges are graduated in fractions or 0-100%. Custom marked dials to suit most size tanks. 100mm or 160mm dial size.

Connection standard 3/4"bsp Non-return valve or 1/2"bsp Low Loss connector.

Schematic

