

Pressure Gauge – General Purpose Small Gauges



Model 6SG

Application:

For non aggressive gaseous and liquid media which are not highly viscous and do not crystallize. For the measurement of gas or vapour the gauges must be used in accordance with the safety regulations stated in EN837-2.

Nominal Dial Sizes:

40, 50, 63 & 80mm (also available in ABS case)

Accuracy:

40 & 50mm: Class 2.5%
63 & 80mm: Class 1.6%

Ranges:

from 0/-1 to 0/40bar & psi.
Higher pressures are available please enquire.

Specifications

Sensing:

Bourdon Tube

Case & Bezel:

Black steel/ABS

Connection:

*Brass: - bottom or back,
40 & 50mm; 1/8", 1/4"bspt
63 & 80mm; 1/4bsp*

Window:

Polycarbonate

Dial:

Standard dual scale bar/psi.

Dial Scales:

Non standard to customer specification

Pointer:

Aluminium

Logos:

Minimum quantity 100 pieces per specification.


Options:

Back flange for surface mounting.


*Back connection for direct panel mounting
with front flange clamp fixing or 3 hole fixing.*

Pressure Gauge – General Purpose Small Gauges


Model 601

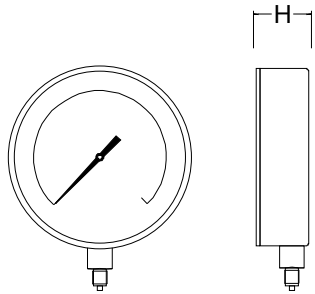


Model 604

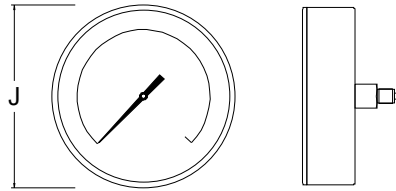

Model 607

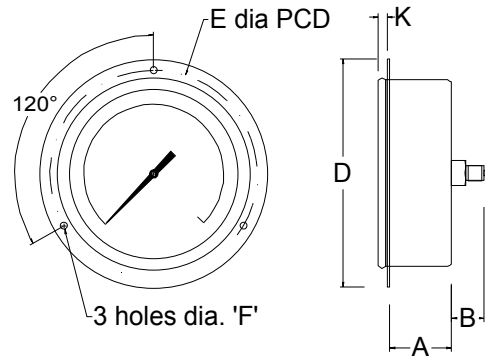

Model 609

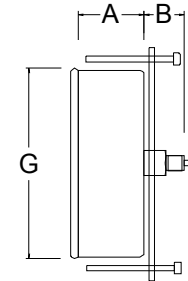

Nominal Diameter	A	B	D	E	F	G	H	J	K	PANEL CUTOUT
40			64	53	4	43	26.5	40.5	7	41
50	24	24	74	64	4	54		51.5	7	50
63			88	78	5	68		62.8	7	64

40, 50 & 63mm gauges Model 601, 604, 607 & 609

